



Windshield for Club Car DS (2000.5 and Older Models) Installation Instructions



Windshield





7 Windshield Clips

Note: When unpacking windshield, do not remove protective covering with a scraper, razor blade or other tool that may scratch the windshield.

1. Place 3 Windshield Clips on lower portion of Strut. Channels on Windshield Clips should be toward the front of the cart.




2. Place windshield on cart inserting bottom of windshield in clip channels.

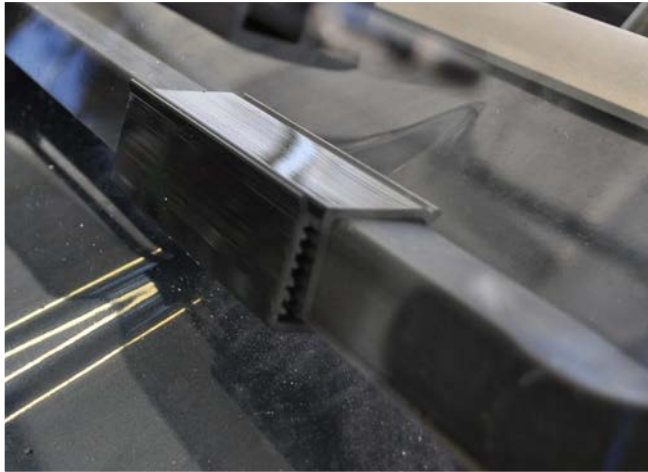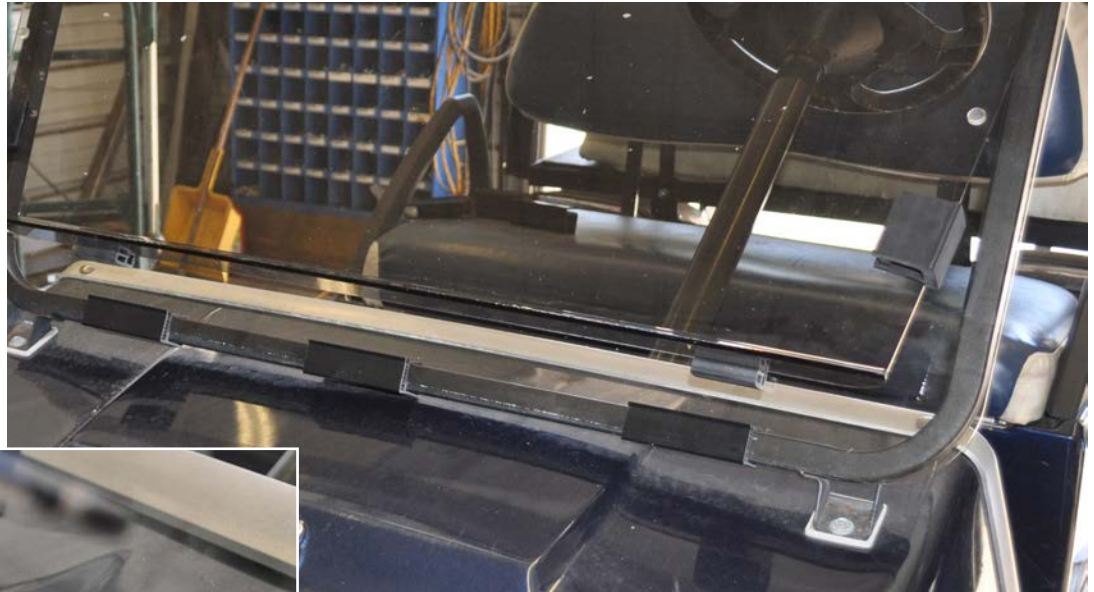


Note: Top of Windshield has clamps attached. Place Bottom of windshield into channels

3. Place 2 Windshield Clips on driver and passenger sides of windshield.

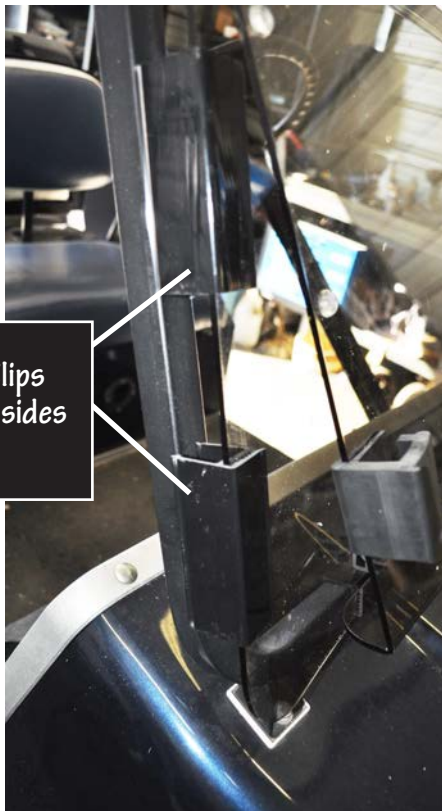

Place Windshield Clips to windshield on both sides of vehicle.

4. Snap Windshield Clips onto vehicle struts.

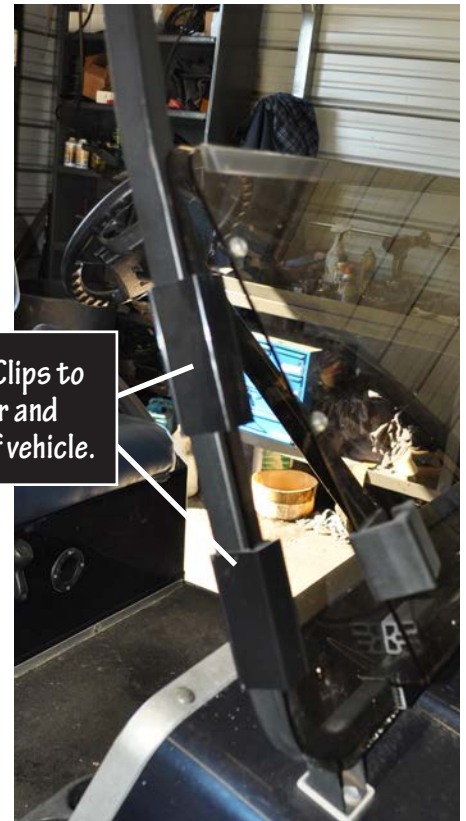

Snap Windshield Clips to Struts on driver and passenger sides of vehicle.



5. To have unfolded windshield, secure with clamps.

Note: Squeaking may occur, caused by friction between windshield and Windshield Clips. Application of a spray lubricant (such as WD-40) down channels of Windshield Clips should minimize this.